

## TRACE

“Light reveals shape”



To be installed in a recessed position and integrated perfectly – in this way, all recessed wall luminaires from the TRACE model, blend perfectly into their environment.

The different versions of the TRACE offer a wide range of designs that can create numerous patterns on a wall due to their characteristic design feature – a matt black finish on the glass.

Speaking of the night... The TRACE stands for an extraordinary homogeneous light – which perfectly conceals the source of light.

The TRACE: A highlight during the day and at night!



## TRACE

Perfectly integrated – and still optically present. What at first sounds contradictory, the TRACE combines in a perfect way.

For footpaths, stairs or rooms – everywhere that pleasant lighting and an optical highlight are desired, the luminaire can be found. Due to the protection rating IP 65, it ensures a warm white temperature colour for the best lighting at all times – in any type of weather. A total of four versions are available for a wide variety of requirements.

The luminaire consists of cast aluminium and tempered glass, with a screen-printed matt black covering.

The equipment includes a symmetrical or asymmetrical reflector made of textured, white-painted aluminium and a bracket that is attached to the floor at a 90-degree angle for a pleasant indirect lighting effect.

The mounting box, sold as an accessory, is required for installation.



## TRACE 100 | HORIZONTAL

TRACE 100 | 22.01022.2V001  
LED 1W SKI (3000K)/HORIZ/SYM


Luminaire housing made of aluminium  
Light emission from tempered glass  
Internal horizontal printing, black matt  
Light distribution: symmetrical  
Equipment: 1W (3000K) (100-240V 50-60Hz)  
Ingress protection IP65, protection rating I

Installation only in connection with  
installation housing TRACE 65 100


Connection: Terminal up to 3 x 2.5 mm<sup>2</sup> in the luminaire  
L90 B10 100.000h | CRI 80 | MacAdams <3



### Light distribution

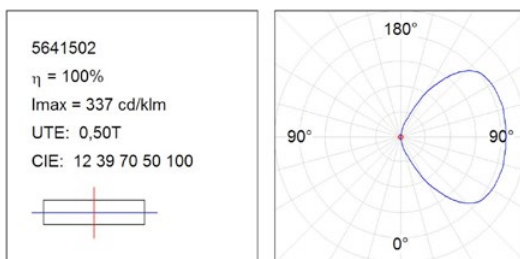

### Drawing

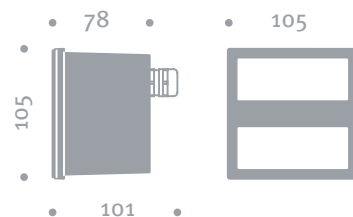


### Accessories



Recessing box  
TRACE 100 | 22.00000.2V001  
Made of aluminium

\* Required accessory



## TRACE 200 | HORIZONTAL

TRACE 200 | 22.02013.2V001  
LED 1W SKI (3000K)/HORIZ/ASYM


Luminaire housing made of aluminium  
Light emission from tempered glass  
Internal horizontal printing, black matt  
Light distribution: asymmetrical  
Equipment: 1W (3000K) (100-240V 50-60Hz)  
Ingress protection IP65, protection rating I

Installation only in connection with  
installation housing TRACE 65 200


Connection: Terminal up to 3 x 2.5 mm<sup>2</sup> in the luminaire  
L90 B10 100.000h | CRI 80 | MacAdams <3



### Light distribution

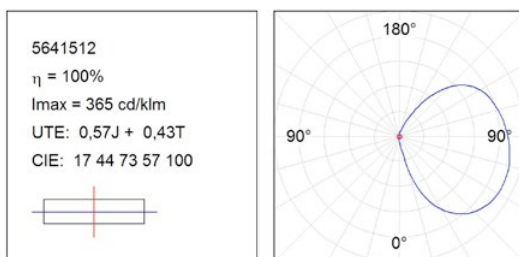

### Drawing

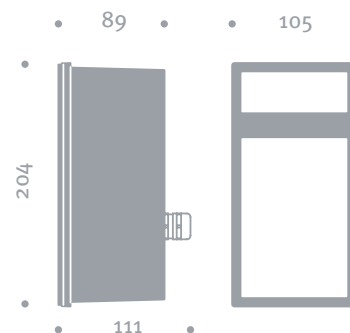

### Accessories



Recessing box  
TRACE 200 | 22.00000.2V002  
Made of aluminium

\* Required accessory



## TRACE 200 | VERTICAL ASYMMETRICAL

TRACE 200 | 22.02012.2V001  
LED 1W SKI (3000K)/VERT/ASYM


Luminaire housing made of aluminium  
Light emission from tempered glass  
Internal vertical printing, black matt  
Light distribution: asymmetrical  
Equipment: 1W (3000K) (100-240V 50-60Hz)  
Ingress protection IP65, protection rating I

Installation only in connection with  
installation housing TRACE 65 200


Connection: Terminal up to 3 x 2.5 mm<sup>2</sup> in the luminaire  
L90 B10 100.000h | CRI 80 | MacAdams <3



### Light distribution

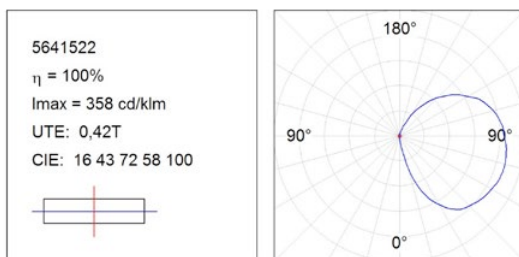

### Drawing

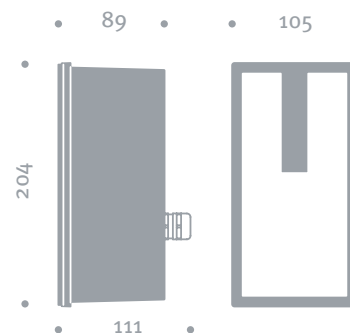

### Accessories



Recessing box  
TRACE 200 | 22.00000.2V002  
Made of aluminium

\* Required accessory



## TRACE 200 | VERTICAL SYMMETRICAL

TRACE 200 | 22.02023.2V001  
LED 3W SKI (3000K)/VERT/SYM


Luminaire housing made of aluminium  
Light emission from tempered glass  
Internal vertical printing, black matt  
Light distribution: symmetrical  
Equipment: 3W (3000K) (100-240V 50-60Hz)  
Ingress protection IP65, protection rating I

Installation only in connection with  
installation housing TRACE 65 200


Connection: Terminal up to 3 x 2.5 mm<sup>2</sup> in the luminaire  
L90 B10 100.000h | CRI 80 | MacAdams <3



### Light distribution

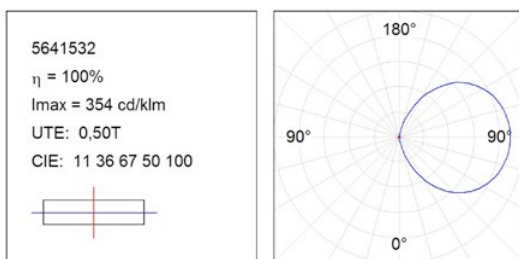

### Drawing

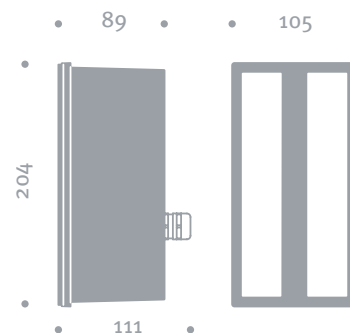

### Accessories



Recessing box  
TRACE 200 | 22.00000.2V002  
Made of aluminium

\* Required accessory

